


# INSTALLATION GUIDE

## CONNECTOR COLOR CODE AND WIRE FUNCTION DIAGRAM

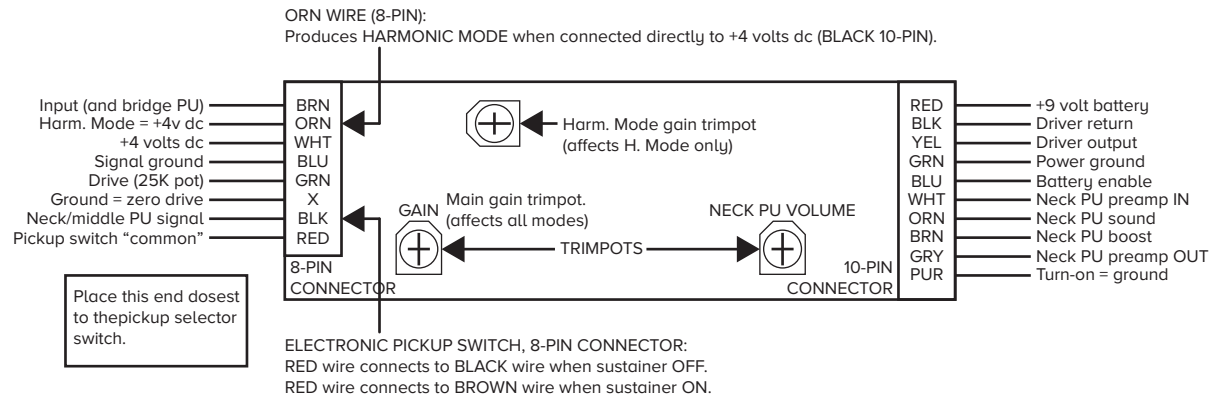

### Disclaimer:

This installation guide can be used for all types of guitar pickup configurations, such as SSS, HSS, HH and HSH, the installation is very simple and easy, just replace the neck pickup and follow the wiring diagram that have been sequenced, no need to change the default guitar cable.

### Notes:

The sustainer setting must be condition (ON) then set the of the sustainer driver distance to guitar strings as needed.

In order for the sustainer to be at its maximum performance point we don't recommend low quality strings, low quality guitar strings don't contain a lot of significant material for the magnetic pull of the pickups to the strings, use new guitar strings to make sure all the notes work properly.

The impedance of the bridge pickup greatly affects the strength of the sustainer driver's electro-magnetic waves to the strings, the greater the impedance of the bridge pickup, the stronger the sustainer performance.

To use an active bridge pickup use separate batteries, (recommended) one battery capacity is only for sustainer, is not good if used together with other. (optional)

Everything has through a quality test process to ensure the sustainer functions properly, if you need help, please contact us soon.

©2024 ISUSTAINER.COM

## DRIVER POSITION AND STRINGS DISTANCE

